

## Features:

- Two-way active speaker with one 15" woofer and one 2" driver.
- Cabinet is made from polypropylene and special high-tech material. It's durable, anti-shock and has good damping characters.
- Voice coil in the 15" woofer is made from  $\varnothing$  75mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- Rotatable 50-100°x55° (HxV) dispersion horn makes it suitable for any performance purposes.
- Molded-in pole mount, easily suspended.
- Vertical or horizontal layout, can be used as a monitor or in any flying systems.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.



**Beta Three**




## Model: UI5a

### Technical Parameters

System:	Built-in crossover two way full range active speaker
Driver Quantity:	15"x1(Low) 1 x $\varnothing$ 44mm Driver
Frequency Response(-3dB):	40Hz-18KHz
Frequency Response(-10dB):	35Hz-20KHz
Max Sound Level(dB/1M):	120dB
Level Adjust range:	$\pm$ 10dB(100Hz)-Bass $\pm$ 10dB(10KHz)-Treb
Output power:	300W(Bass)+100W(Treb)
Distortion:	Line-0.02%, Microphone-0.04%
Rotatable horn(HxV):	50-100°x55°
Load impedance:	Treb - 8Ohm, Bass - 8 Ohm
Input impedance:	Line - 20KOhm, Microphone - 10KOhm
Connectors:	XLR K3P
Power supply:	AC 115/230V, 50/60Hz
Dimensions(WxDxH mm/pcs):	485X460X700mm
Packing Dimensions(WxDxH mm/pcs)	545X515X800mm
Net Weight(Kg/pcs):	30.5Kg
Gross Weight(Kg/pcs):	33.7Kg



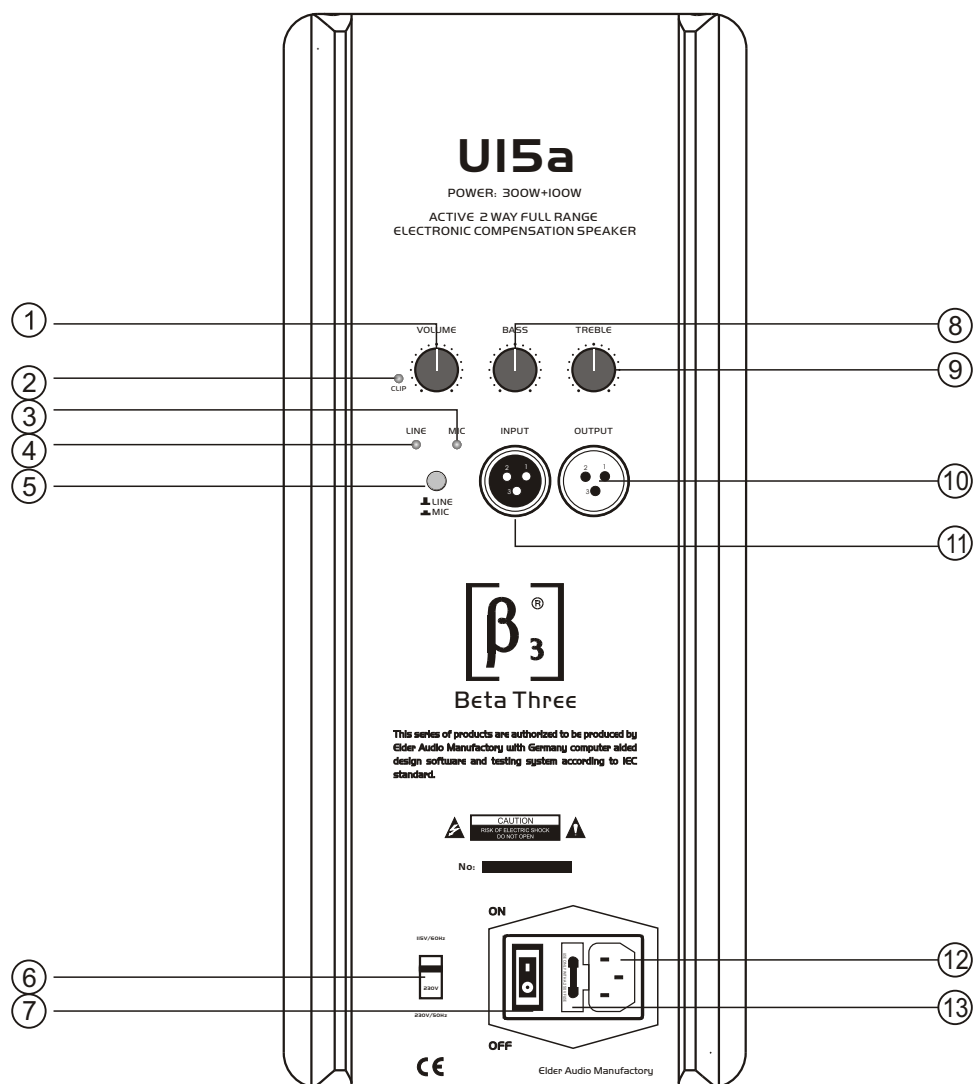

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>1. Volume control.</li> <li>2. Clip indicator.</li> <li>3. Microphone input signal presence indicator.</li> <li>4. Line input signal presence indicator.</li> <li>5. Line/microphone selector.</li> <li>6. 115V/230V voltage input selector.</li> <li>7. Power <b>ON/OFF</b> switch.</li> <li>8. Bass control.</li> </ul> | <ul style="list-style-type: none"> <li>9. Treble control.</li> <li>10. Line/microphone output.</li> <li>11. Line/microphone input.</li> <li>12. Power supply input. Make sure that the voltage selector is set for your country's correct voltage.</li> <li>13. Protection fuse. Use only fuses of the correct amp rating.</li> </ul> |
|--|---|

*Cosmetic changes may be made*

