

Features:

- Active low frequency speaker with one 12" woofer.
- Cabinet is made from polypropylene and special high-tech material in large injection mold. It's durable, anti-shock and has good damping characters.
- Voice coil in the 12" woofer is made from \varnothing 75mm copper cladding aluminium ribbon wire. Its efficiency is 20% higher than normal round wires.
- Heavy duty protective grille.




Beta Three



Model: UI2Ba

Technical Parameters

System:	Active low frequency speaker
Cabinet material:	Polypropylene, Trapezoid
Cabinet Colors:	Black, White, Blue, Gray
Drive Quantity:	1x12" (Bass)
High Cut Adjustable:	80Hz-250Hz
Average Sound Level:	122dB
Max Sound Level:	125dB/1m Peak Power
Output Power:	400W
Distortion:	0.02%(Line)
Load Impedance:	4 Ohm(Bass)
Input Impedance:	20 KOhm
Connectors:	XLR(Line), 1/4"K3P
Power Supply:	AC115V/230V, 50/60Hz
Dimensions(WxDxH mm/pcs):	415x391x600mm
Packing Dimensions(WxDxH mm/pcs)	465X435X680mm
Net Weight(Kg/pcs):	23.2Kg
Gross Weight(Kg/pcs):	25.4Kg

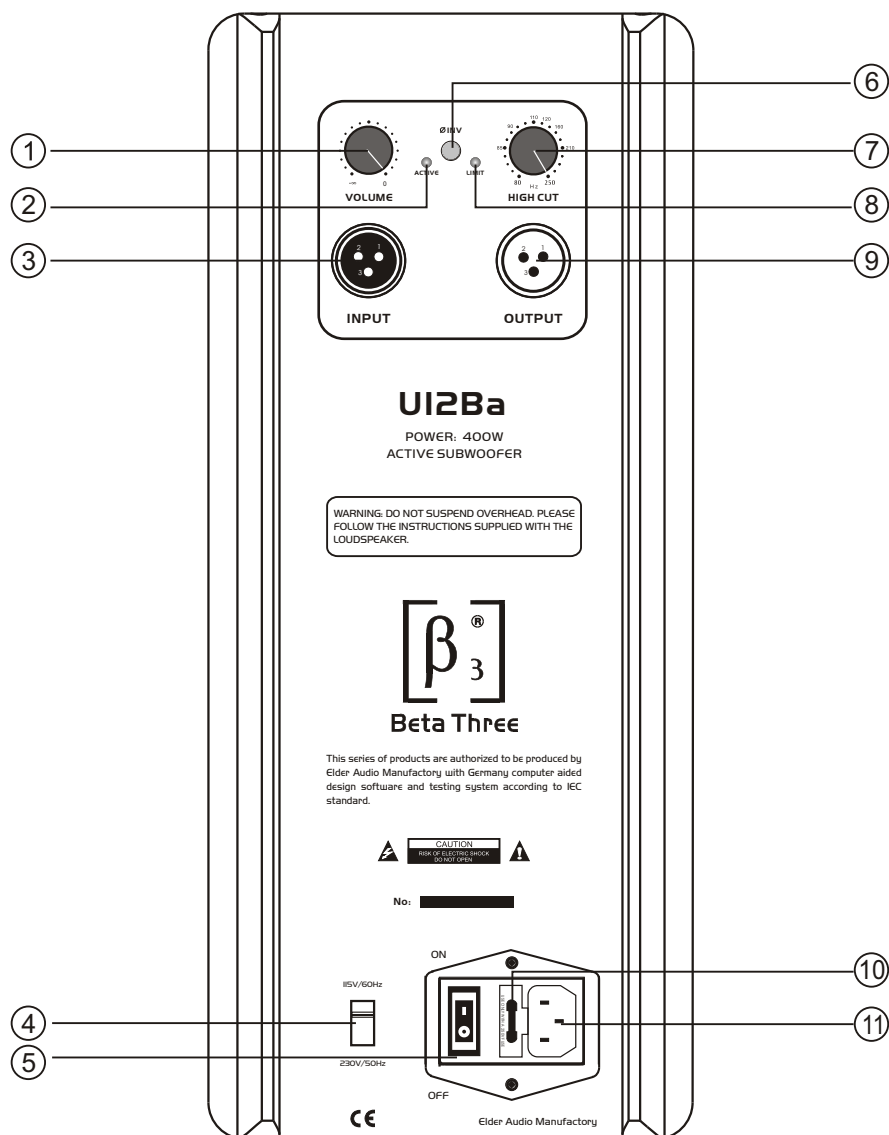

- | | |
|--|---|
| <ol style="list-style-type: none"> 1. Volume control. 2. Active indicator. 3. Line/microphone input. 4. 115V/230V voltage input selector. 5. Power ON/OFF switch. 6. Phase inverting switch. 7. High cut.(80Hz~250Hz adjustable) | <ol style="list-style-type: none"> 8. Limit indicator. 9. Line/microphone output. 10. Protection fuse. 11. Power supply input. Make sure that the voltage selector is set for your country's correct voltage. |
|--|---|

Cosmetic changes may be made

